




Model	AGX-38	AGX-26	AGX-15
Frequency Range	30~200kHz		
Frequency Tolerance at 25 °C	± 25 ppm or 100 ppm		
Shunt Capacitance (C ₀)	1.8 pF (Typical)	1.5 pF (Typical)	1.2 pF (Typical)
Load Capacitance (C _L)	12.5 pF (Typical)		
Operating Temperature Range	-10 to + 60°C		
Storage Temperature Range	- 40 to + 85°C		
Drive Level	1.0 uW max.		
Shock Resisistanc	± 5 ppm max.		
Aging	± 3 ppm max. per year		

Euqivalent Series Resistance (ESR)

Mode	Frequency	ESR
AGX-15	32.768 KHz	60 KΩ Max.
AGX-26	32.768 KHz	40 KΩ Max.
AGX-38	32.768 KHz	35 KΩ Max.

Dimension: (mm)

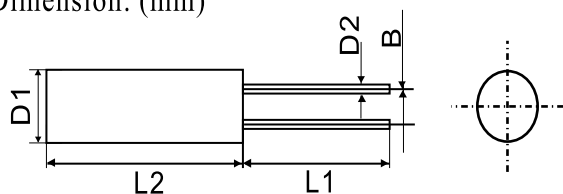

Mode	L1	L2	D1	D2	B
AGX-15	5.9±0.2	5.0 Max	φ 1.5±0.2	φ 0.18±0.02	0.5±0.2
AGX-26	7.5±0.2	6.3 Max	φ 2.0±0.2	φ 0.25±0.02	0.7±0.2
AGX-38	10.0±0.2	8.0 Max	φ 3.0±0.2	φ 0.32±0.02	0.8±0.2