
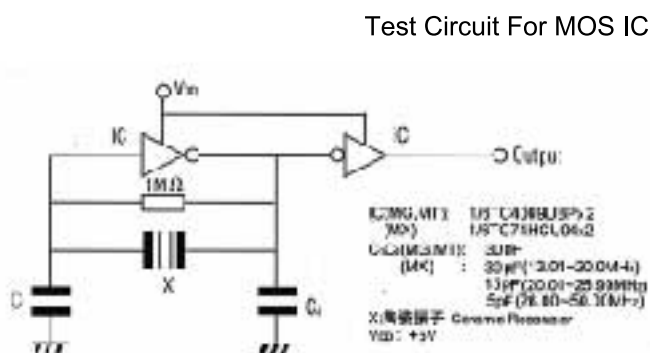



## ● ZTA Series of Ceramic Resonator

1.80-50.00MHz

- **Technical Characteristics:**

| Part Number | Frequency Range (MHz) | Frequency Accuracy(25℃)(%) | Stability in Temperature (-20~+80 ℃)(%) | Operating Temperature( ℃) | Aging For Ten Years (%) |
|-------------|-----------------------|----------------------------|-----------------------------------------|---------------------------|-------------------------|
| Z TA □□□ MG | 1.80-6.00             | ±0.5                       | ±0.3                                    | -20~+80                   | ±0.3                    |
| Z TA □□□ MT | 6.01-13.00            | ±0.5                       | ±0.3                                    | -20~+80                   | ±0.3                    |
| Z TA □□□ MX | 13.01-50.00           | ±0.5                       | ±0.3                                    | -20~+80                   | ±0.3                    |

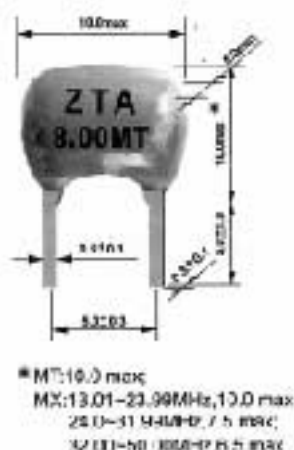

## ● ZTT Series of Ceramic Resonator With Built-in Capacitor

1.80-50.00MHz

- **Technical Characteristics:**

| Part Number      | Frequency Accuracy<br>(25 °c)(%) | Stability in Temperature<br>(-20~+80 °c)(%) | Aging For Ten Years<br>(%) |
|------------------|----------------------------------|---------------------------------------------|----------------------------|
| ZTT1.08-6.00MG   | ±0.5                             | ±0.3                                        | ±0.3                       |
| ZTT6.01-13.00MT  | ±0.5                             | ±0.3                                        | ±0.3                       |
| ZTT13.01-50.00MX | ±0.5                             | ±0.3                                        | ±0.3                       |

